




ARIZONA™ HEAVY DUTY SUPERELASTIC - CODE 175


Description: A white spiral helix embedded in a grey superelastic flexible PVC.

Temperature Range: -25°C +55°C

Applications: This hose has an excellent abrasion resistance to cereals, grains, animal feeds, sand and gravel. It is also suitable for slurries and large particle transfer. This hose also has good resistance to many chemicals.

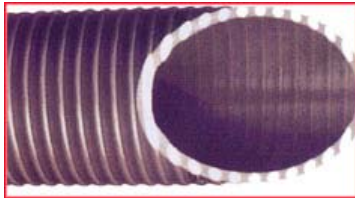

Advantages: Good weathering resistance. A hose for heavy duty applications, excellent crush resistance, easy to handle due to the use of superelastic compounds.



I.D. mm.	O.D. mm.	Weight gr./mtr.	Bending Radius mm.	Vacuum m.H2O	Working Pressure bar	Coil Length mtr.
25	34.2	600	160	9	11.5	30
32	41.6	700	190	9	9	30
38	48.0	800	230	9	9	30
51	61.2	1200	290	9	7	30
63	77.0	1700	360	9	7	30
76	87.4	2000	450	9	6	30
90	103.2	2500	560	9	5	30
102	114.4	3300	640	9	4.5	30
127	141.6	4200	860	9	4.5	30
152	169.8	5900	1100	9	2.5	20

**All data refers to performance at 18°C. Any increase of temperature, above or below, will affect the performance data. We reserve the right to change all technical data without prior notice.

BRANCHES AT:

2 Witney Road
Nuffield Industrial Estate

POOLE

BH17 0GH

Tel: 01202 673333

Fax: 01202 687788

poole@hyphose.com

Unit 3, The Warrior Centre
Fitzherbert Road, Farlington

PORTSMOUTH

PO6 1TX

Tel: 023 92 324644

Fax: 023 92 325549

portsmouth@hyphose.com

Unit 1, Trinity Industrial Estate
Millbrook Road

SOUTHAMPTON

SO15 0LA

Tel: 023 80 512555

Fax: 023 80 512999

southampton@hyphose.com

www.hyphose.com

REGISTERED IN ENGLAND NUMBER 1472439

REGISTERED OFFICE: 2 Witney Road, Nuffield Industrial Estate, POOLE, BH17 0GH

DIRECTORS: S P GRINTER, D W JOHNSON, A-C BARWICK