

LUISIANA BLACK (LOW-TOXIC) – CODE 110

Description: A shiny spiral helix embedded in black flexible PVC.



Temperature Range: -5°C +35°C

Applications: A multi-purpose hose for light duty suction and discharge use in the agricultural industrial and aquatics market.

Used in horticulture markets for Irrigation and turf management, as bilge and sanitation pump hose in the marine industry, as a coolant hose in general industrial markets, and as a light duty hose for dilute chemicals.

Advantages: Lightweight, flexible, smooth bore, easy to handle.

Extensive size range.

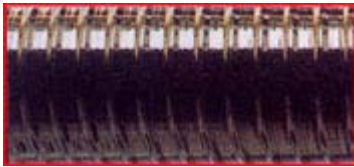

I.D. mm.	Weight gr./mtr.	Vacuum m.H2O	Working Pressure bar	Coil Length mtr.
12	130	6	7	30
16	150	6	7	30
20	200	6	7	30
22	220	6	7	30
25	280	6	7	30
28	320	6	7	30
32	380	6	7	30
28	470	6	6	30
40	510	6	6	30
50	760	6	6	30

**All data refers to performance at 18°C. Any increase of temperature, above or below, will affect the performance data. We reserve the right to change all technical data without prior notice.

BRANCHES AT:

2 Witney Road
Nuffield Industrial Estate

POOLE

BH17 0GH
Tel: 01202 673333
Fax: 01202 687788

poole@hypohose.com

Unit 3, The Warrior Centre
Fitzherbert Road, Farlington

PORTSMOUTH

PO6 1TX
Tel: 023 92 324644
Fax: 023 92 325549

portsmouth@hypohose.com

Unit 1, Trinity Industrial Estate
Millbrook Road

SOUTHAMPTON

SO15 0LA
Tel: 023 80 512555
Fax: 023 80 512999

southampton@hypohose.com

www.hypohose.com

REGISTERED IN ENGLAND NUMBER 1472439

REGISTERED OFFICE: 2 Witney Road, Nuffield Industrial Estate, POOLE, BH17 0GH

DIRECTORS: S P GRINTER, D W JOHNSON, A-C BARWICK